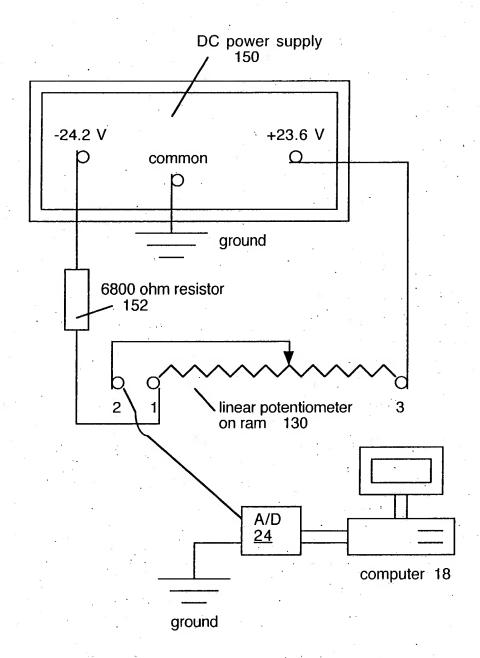
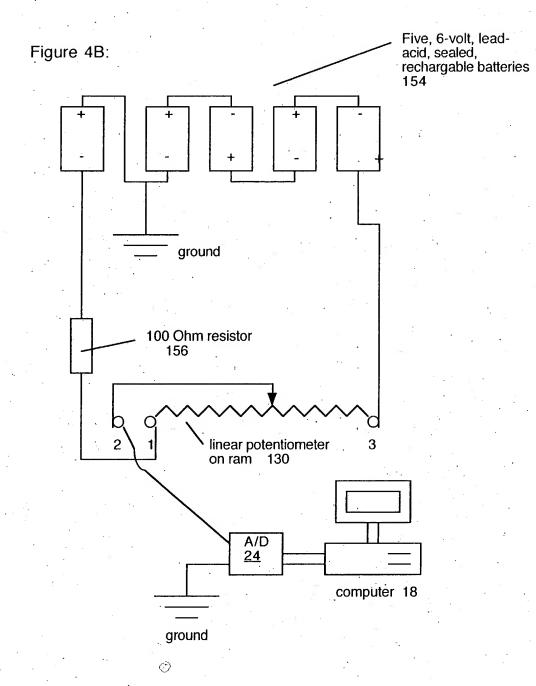



Figure 3:

Figure 4A:







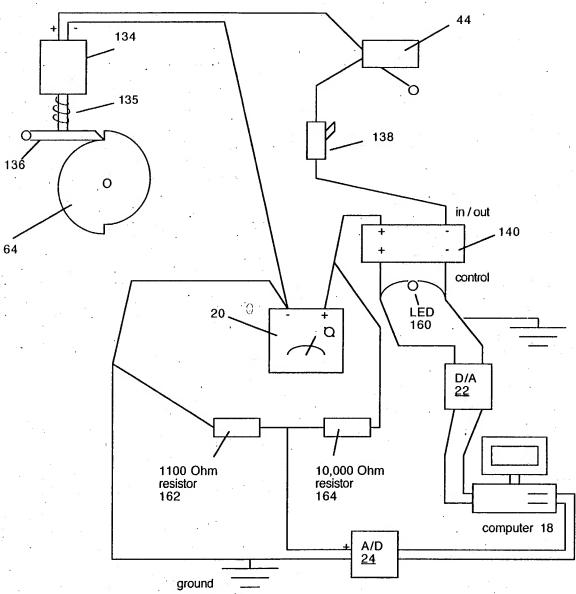

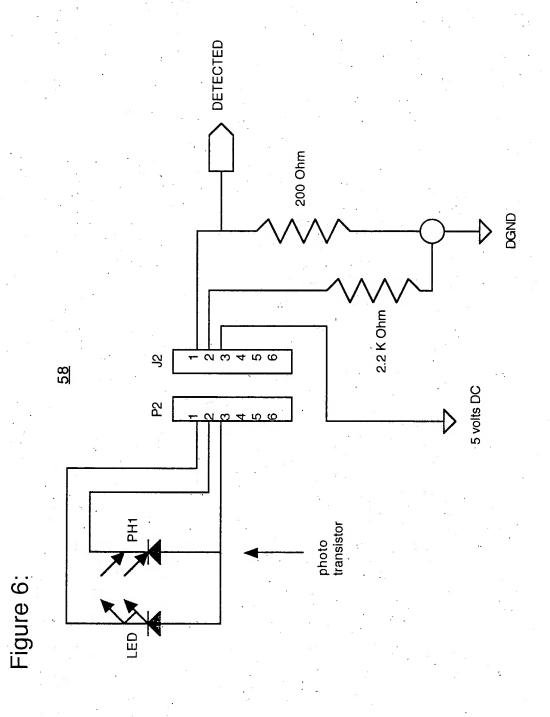


Figure 7:

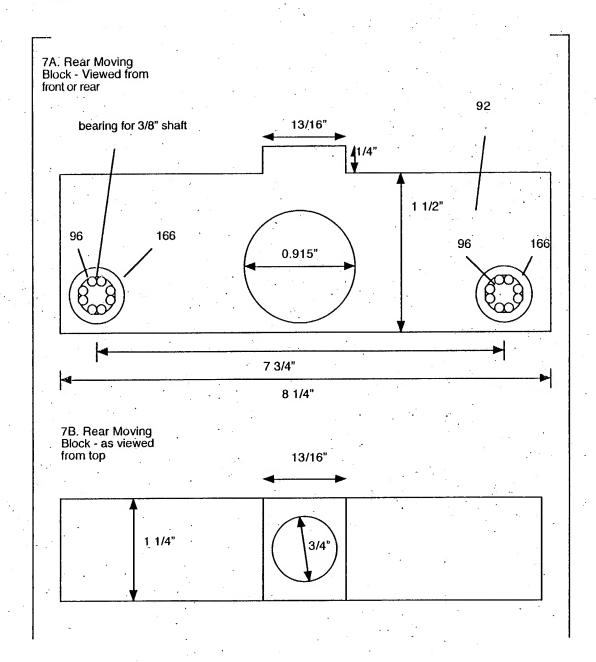
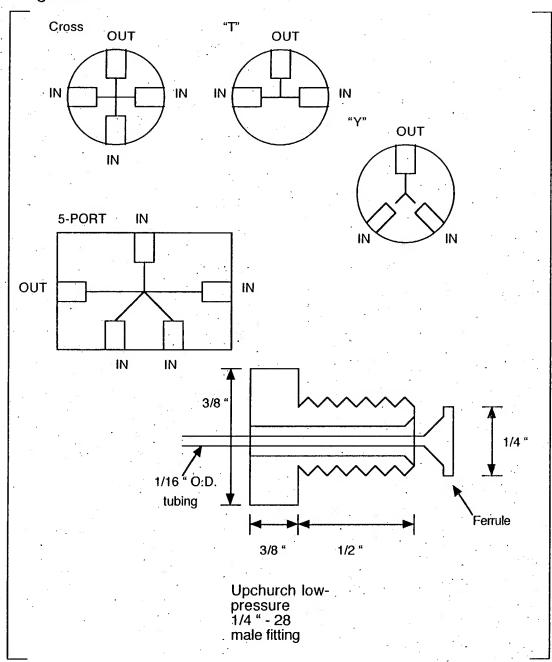


Figure 7, continued: 7D. Threaded Brass Nut 7C. Brass front end piece - 1/8" thick 90 Ō 9/16" 1/4" 93_ 0.915" 1 1/2" 0 1 1/4" . 1 1/8" 174 7E. Removable Brass Locking Pin 1 1/4" 1.1/4" 1/4" 3/4" 94 0.778" 172 0.2" 3/4" 172 94 1/4" 1/4" view from side view from bottom

Figure 8:



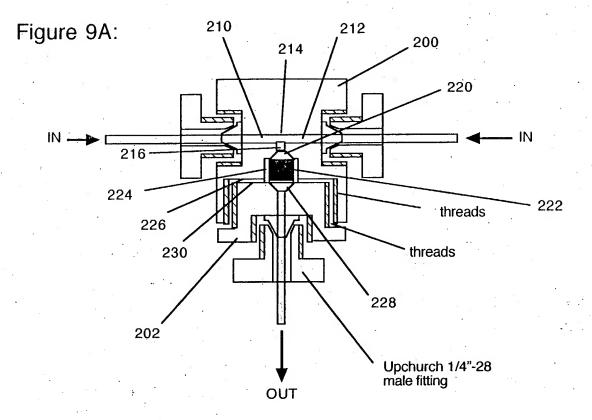


Figure 9B:

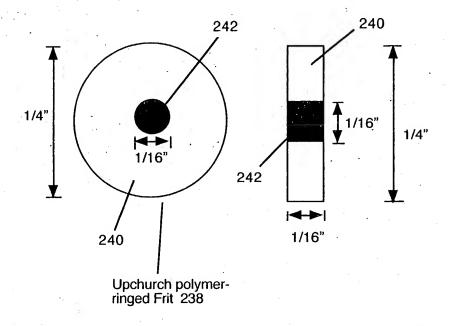
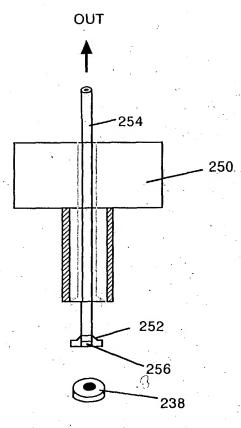


Figure 9B, continued:





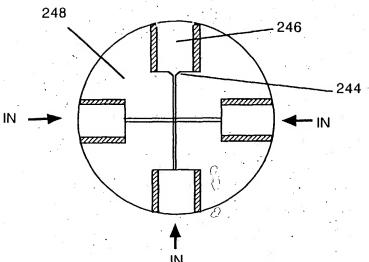


Figure 10:

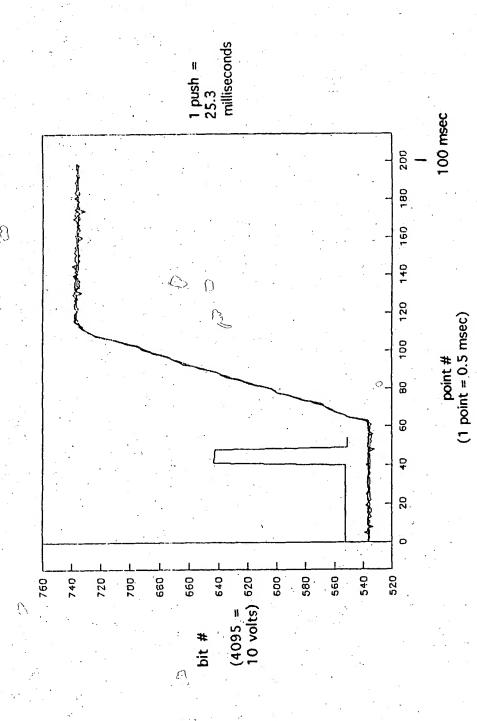


(2

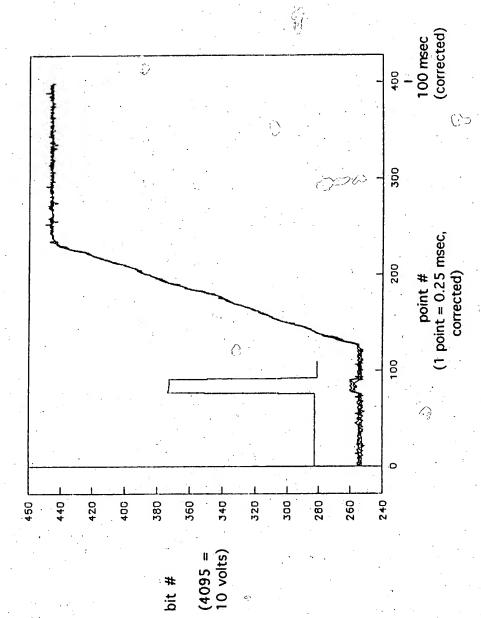


٠

Figure 12:

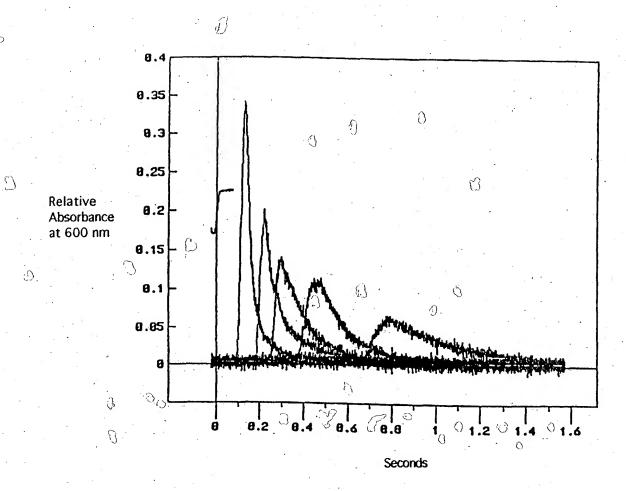

Conditions:

- 1) Continuous laminar flow of carrier stream, Reynolds number (Re) = 821.
- 2) 0.025 second, pulse-injection of dye, centered at time zero.
- 3) Dye is bromphenol blue + HCO3⁻ in water.
- 4) Reaction delay lines are 0.020" (0.5 mm) i.d., and of variable lengths.

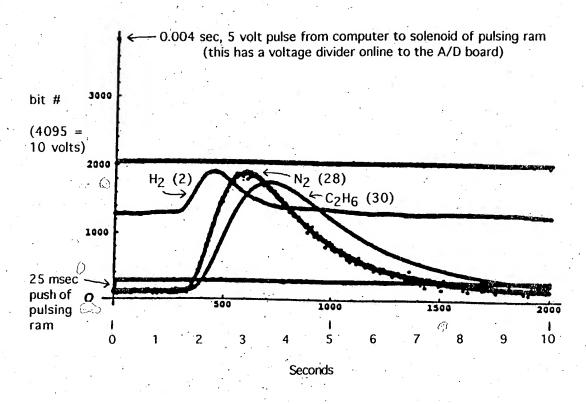

Conditions:

Enzyme syringe: H₂O equilibrated (vol/vol) with 93% N₂, 5% H₂, 2% C₂H₆.

Total pressure = 3.7 atm.

Substrate syringe: omitted.

Carrier: (Argon-sparged H2O. (No check valve in system.)

Reaction delay line: 2 meters long, 1.7 sec long, 0.022" i.d., 1/16" o.d., nylon.

Single pulse of ram.

Sampling mass 2, mass 28, mnass 30, all at 5 msec intervals.

Sampling computer output and ram displacement at 1 msec intervals.


Monitoring Five Channels Concurrently:

- 1. mass 2 (H2)
- 2. Mass 28 (N2)
- 3. Mass 30 (C2H6)

- 4. Computer output pulse to relay of ram.
- 5. Ram displacement.

Figure 14:

Ö

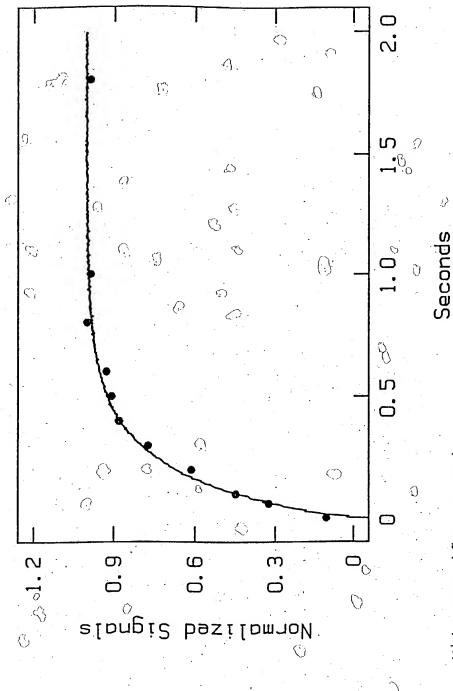

--- H⁺ by stopped-flow spectrophotometry. Monitoring brom cresol purple at 600 nm.

 CO₂ monitored by push-pause-push, membrane inlet mass spectrometry.

 \bigcirc

